



# Fitting Instructions – Stone Effect

These instructions are supplied as a guideline, please read carefully. This information is important and should remain with the end user for future reference.

## Forenote:

- Each Purestone surround is inspected prior to despatch, for manufacturing faults or damage.
- Issues must be reported immediately to your stockist prior to fitting.
- Purestone surrounds are recommended for use with most gas fires that have an output of 4kw or less.
- Do not use with balanced flue, solid fuel, flueless, glass-fronted, or high output convector fires.

## Assembly:

- First remove all parts from packaging.
- If legs are separate, connect each one to top shelf using bolts supplied whilst being careful not to over tighten.
- Position the hearth and fix in place using a mixture of sand and cement, adjust to give a level surface.
- When the hearth is firmly fixed, carefully offer the surround to the wall in order to determine the four fixing positions. Once in place, the four brackets (fig. 1) can be seen through the inside of the legs and their position should be marked on the wall.



fig. 1

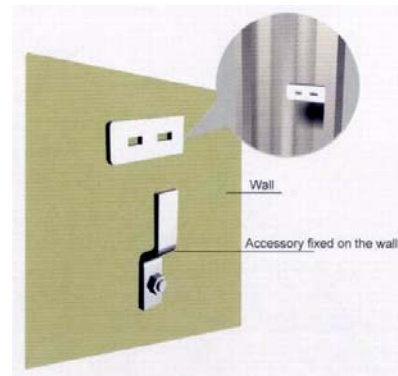


fig. 2

- Remove the surround and firmly fix the brackets to the wall (fig. 2) using your markings as a guideline.
- Introduce the back panel to the empty wall and position centrally.
- Lift the surround in order to hook onto the four wall brackets paying particular attention to its position relative to the centred hearth and back panel.
- Once the surround is fixed firmly, bring the back panel carefully forward to meet the rear edge of the surround legs. The gap behind the back panel and the wall should be packed with a suitable fire-retardant material such as Rockwool.
- Gaps between the surround and the wall, or between individual parts, should be filled / sealed using a colour-matched sealant or decorators caulk.
- For marks or stains, use warm detergent, diluted bleach or carpet / upholstery mousse to remove.
- For further information or advice - please contact 01384 893060 during office hours.

